

MARION COUNTY SURVEYOR'S OFFICE

SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR


SEC. 22 TWN. 16_N RNG. 5_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 9-30-09
Party Chief: Wilcoxen
Crew: Finney
Type of Marker: Harrison
Method of Establishment: County: 5-8-2000
IN S.P.C. E Zone, NAD 83
Name: 16052206
N: 507 507.011 0(m)
E: 75 481.563 0(m)



Line of 34th St 3400 N			E. County Line 12000 E

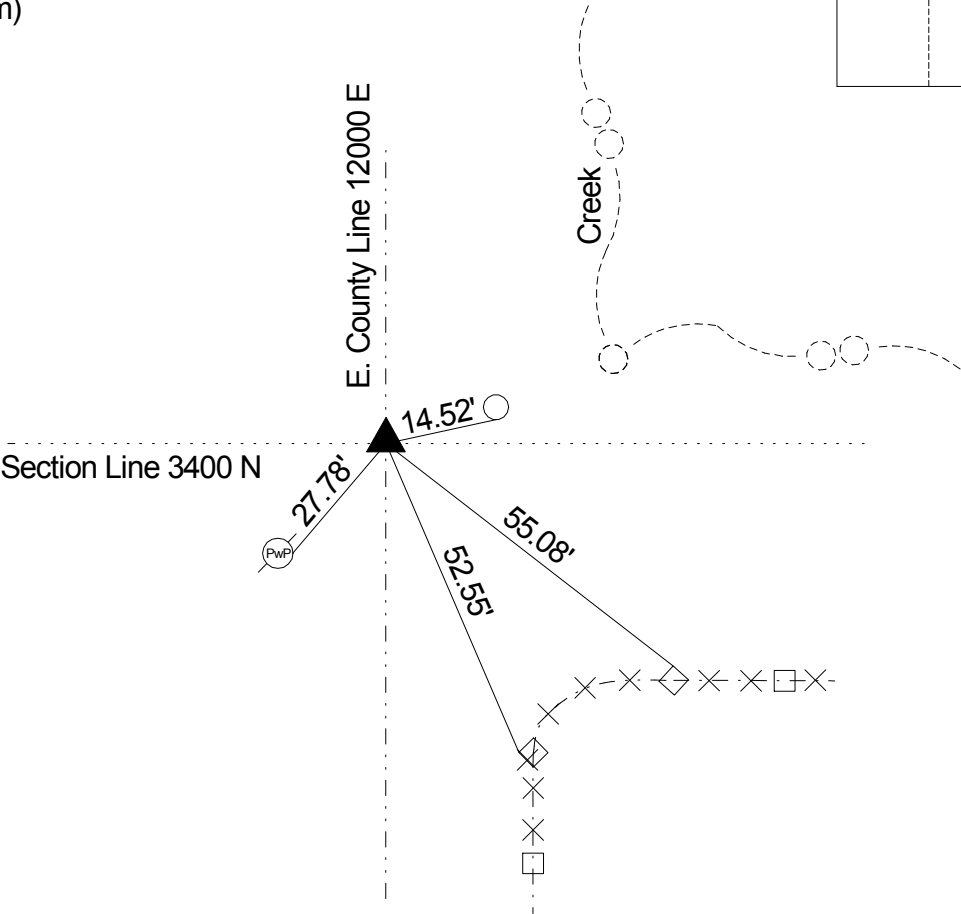

Original post set 1820 by Hendricks with witnesses: 15" ash N 11 E 30 links; 6" dogwood S 47 W 9 links per Marion County Atlas p. 15. No records of stone or witness found. Fortner 3-19-1975 called RR spike over stone. Wilcoxen 8-24-77 called copperweld. Excavated 6-15-95 and a RR spike was found 8" down. No copperweld or stone was found in hole, however a stone measuring 17" x 12" x 7" with a cut 'x' on point was found lying in nearby ditch. Harrison was set where ties crossed and RR spike was found. Retied 5-8-2000. Retied 2-06-06 by Wilcoxen. Retied 9-30-09 by Wilcoxen and a 3" riser was added to Harrison to bring level with pavement.

REF.	DISTANCE	DESCRIPTION
1.	14.52'	Mag nail w/brass washer S buried cable post (leaning to the north) 12" up
2.	55.08'	NE corner 6" gate post
3.	52.55'	Mag nail N side fence post 15" up
4.	27.78'	PK nail E PwP #33-421 F 12" up